



VOLCANO

Water air heater



VOLCANO

The Volcano air heaters are a new generation of devices by combining innovative technical solutions with a modern pattern design. Our precisely executed and light housing resembles the beautiful diamond shape; ideal in its simplicity. The character of the device is emphasized by the composition of the selected materials and dynamically shaped air guide vane.



ENERGY-SAVING EC
MOTORS



THEE-ROW WATER
EXCHANGERS



5 YEAR WARRANTY



AVAILABLE ONLINE
24/7

Modernity

DESIGN

Highly developed casing form guarantees optimal exchanger surface exposure while hiding all structural elements.




SHAPE AND COLOR

The light and clean casing lines, combined with a universal color palette, provide for harmonious adaptation to every room type.



MATERIAL

Made of the highest class ABS with an anti-UV pigment mixture. The casing is characterized by high mechanical strength, durability, and resistance to high temperatures. The material used guarantees unchangeable esthetics, easy to clean, and long-term durability certified by a lifetime warranty for the casing.

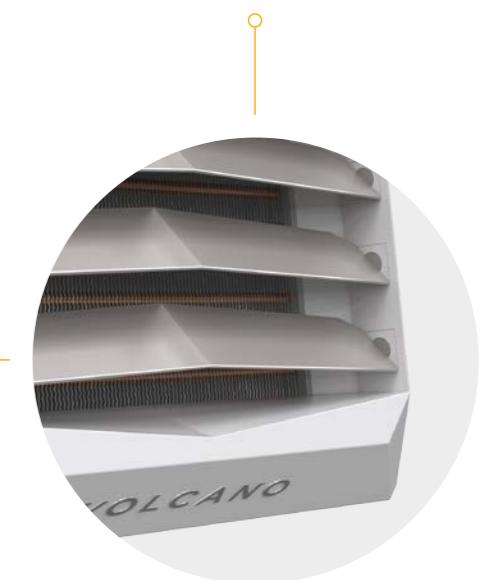


SMART LOCK

Our patented locking system guarantees a durable and precise fit for all casing elements.

Innovativeness


AIR GUIDE VANES

An innovative blade mount solution allows for their individual adjustment and stable positioning. The guide vane profile guarantees minimum air flow resistance rates.

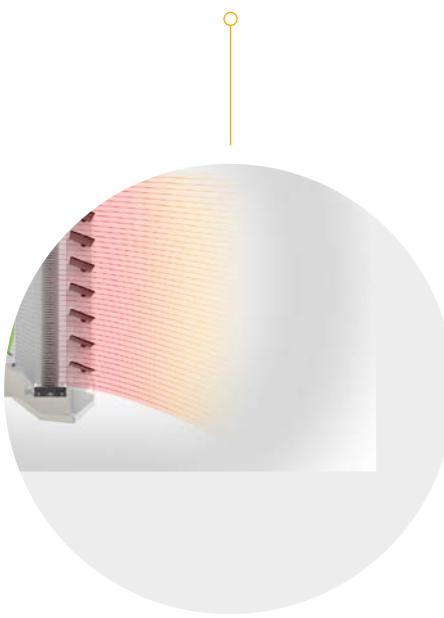



DIFFUSER

The design of the diffuser guarantees total integration with the rear section of the housing and the fan.

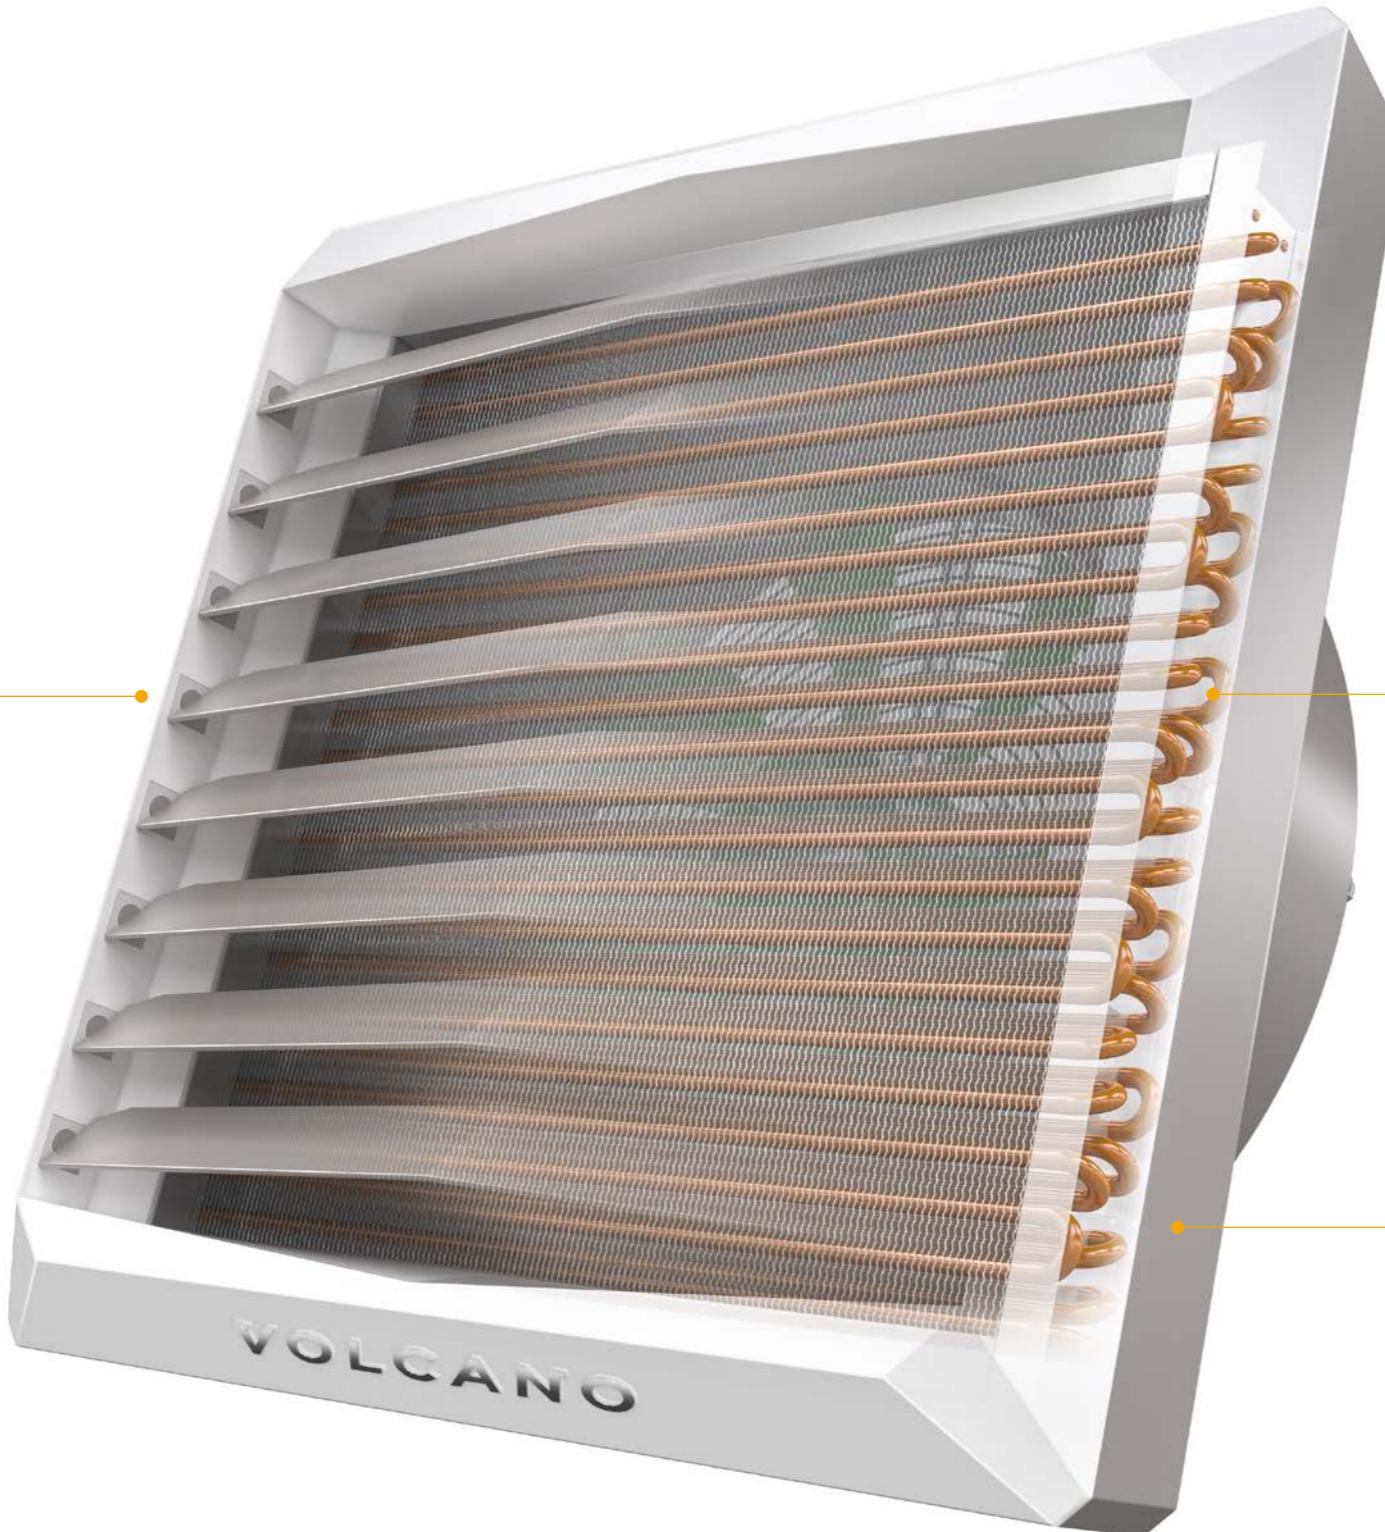

HEAT EXCHANGERS

- 1, 2 and 3-row heaters featuring increased heat exchange surfaces guarantee optimal match of heating power to the requirements of the facility;
- Enhanced heat transfer surface and ability to work with low temperatures agents;
- A test of all exchangers guarantees 100% verification of their tightness.

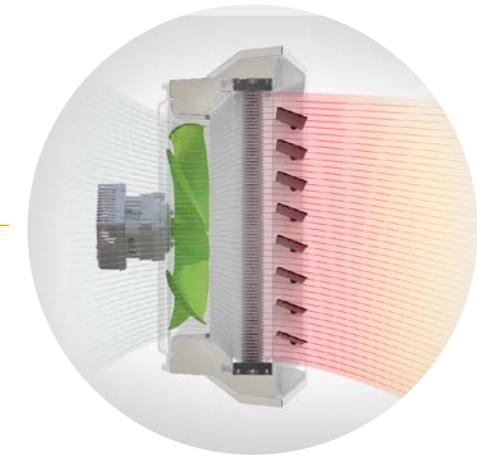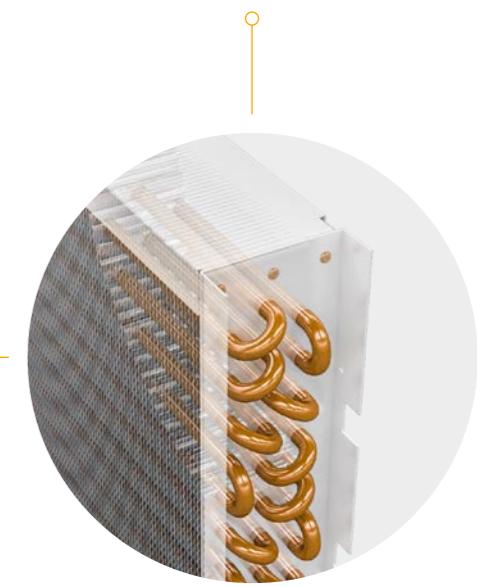

MAXIMUM AIR OUTPUT WITHOUT ANY POWER LOSS

Our ideally matching fan casing and a dedicated diffuser provide for equal distribution of air speed in the exchanger, to guarantee small flow resistance rates and full use of the exchanger's power output.

Energy efficiency


EFFICIENT FANS

Optimized profile and increased blade surfaces guarantee low usage costs and quiet operation.



EFFECTIVE MOTORS

Energy-saving EC motors provide an optimal match of operating parameters for each device, while maintaining minimum electricity consumption levels.

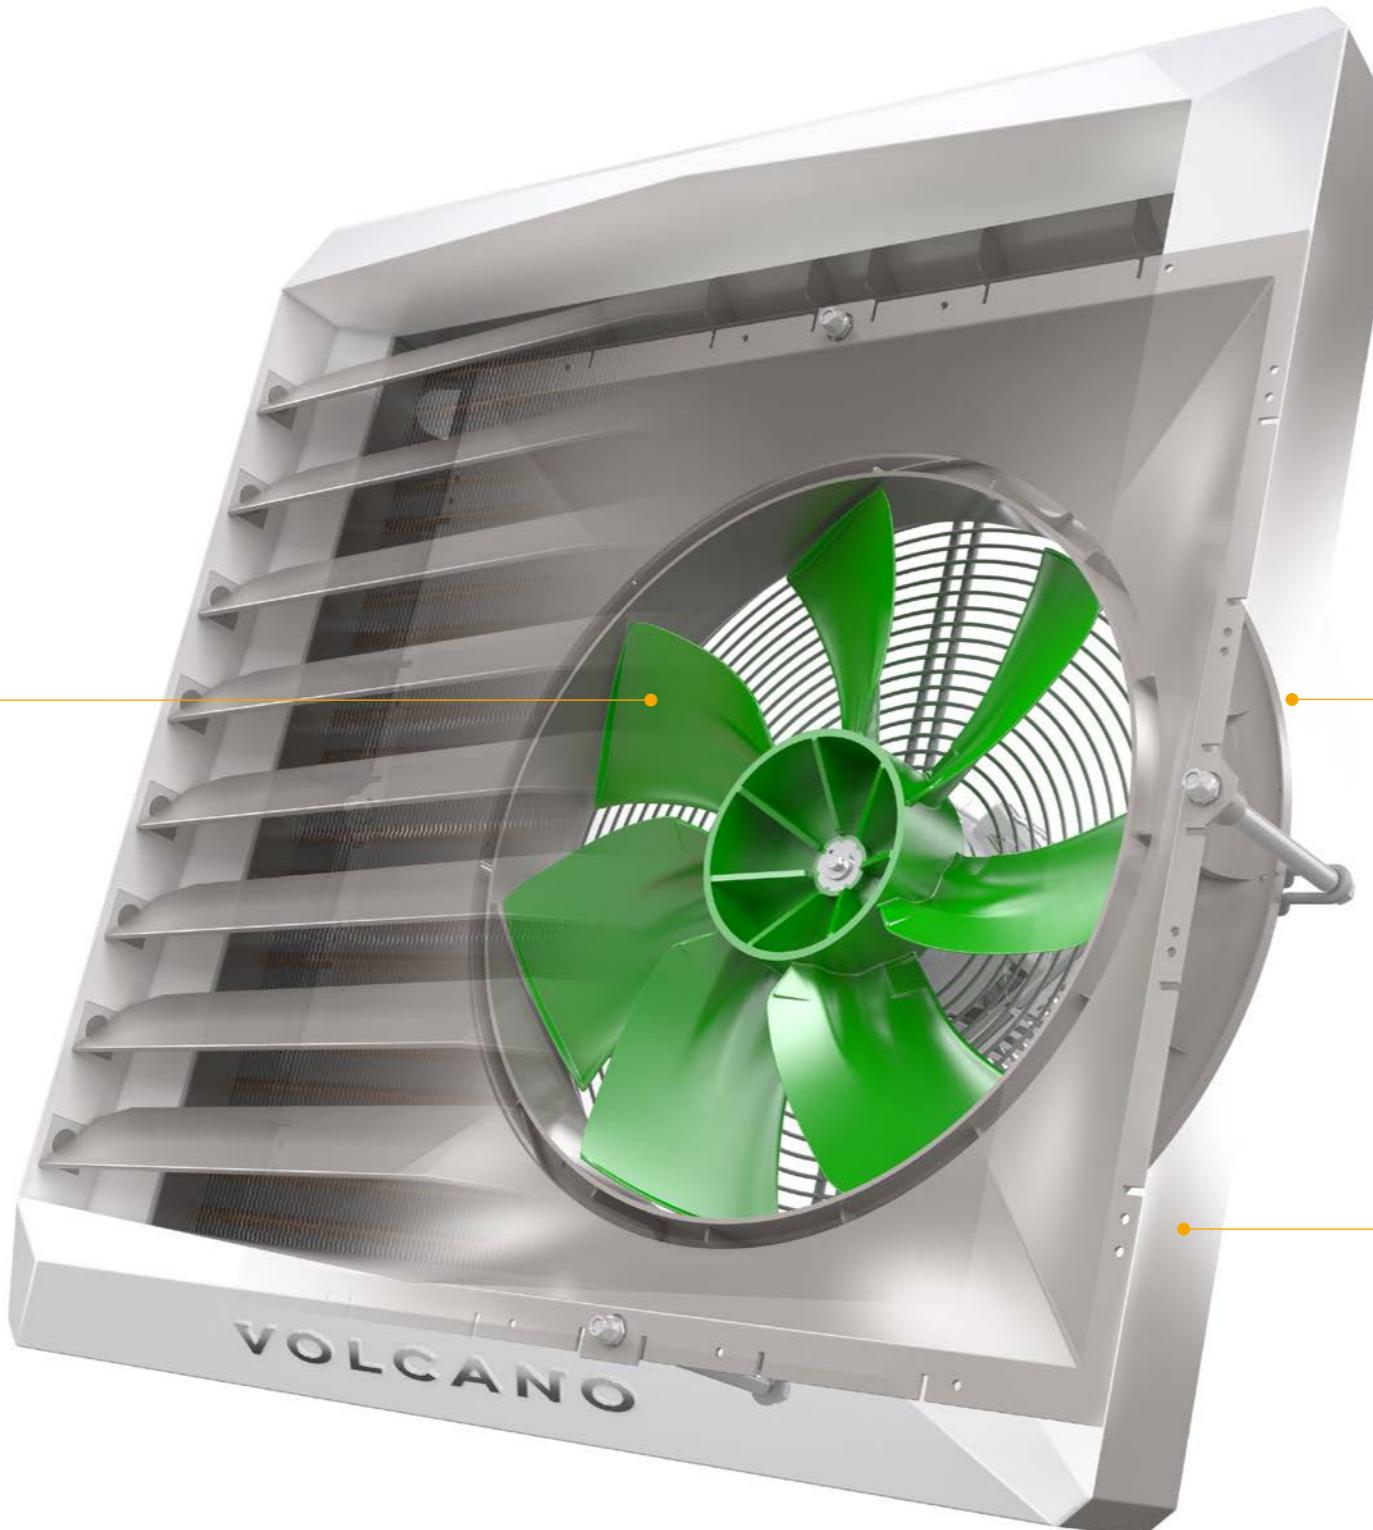

FULL RECYCLING

The device is environmentally-friendly. 100% of materials used can be recycled.



ENERGY-SAVING REGULATION




EC motors guarantee maximum engine efficiency at reduced rotations. Stepless rotation regulation is now available for EC motors.



The Volcano air heater with EC engine



Assembly

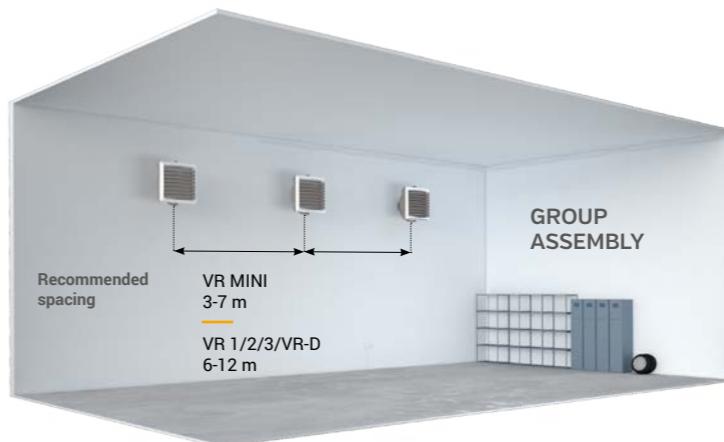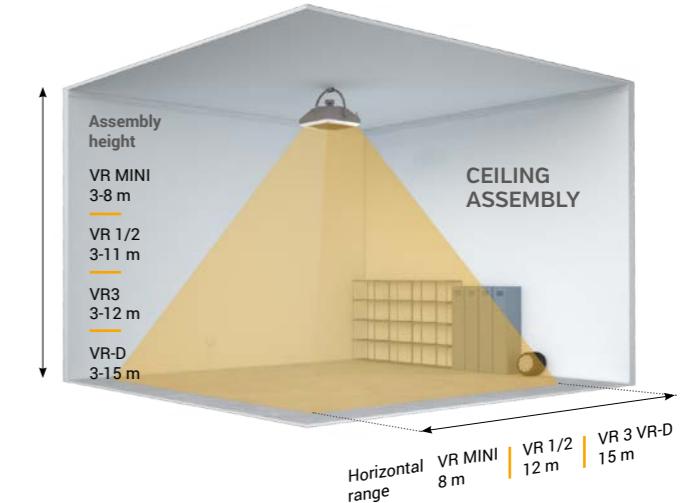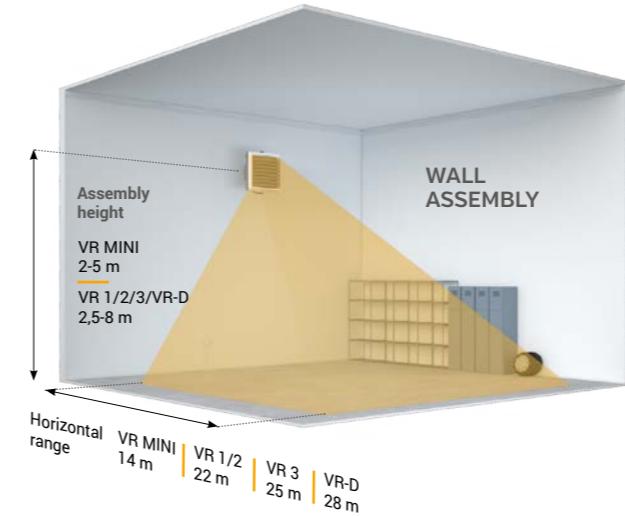


VOLCANO heaters are furnished with a standard assembly console for wall and ceiling mounting of the device.

The maximum vertical range of the devices are 8-15 m, depending on the type of heater. The maximum horizontal range of the devices are 14-25 m.

Notice! If the minimum distance of 0.4m and 0.25m [VR Mini] is not maintained from the wall or ceiling during assembly, the device may operate incorrectly. The fan may be damaged or the entire device may work louder.

ASSEMBLY TEMPLATE

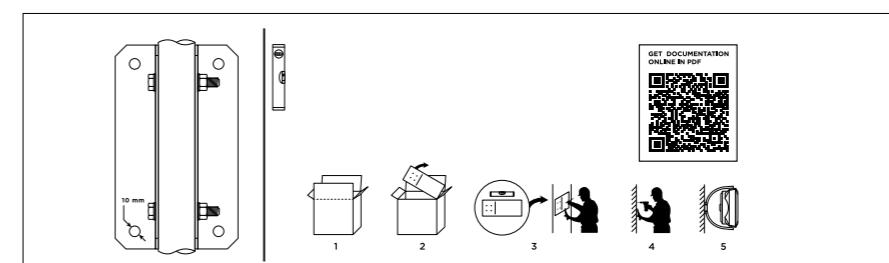


Each VOLCANO air heater package has a printed template representing the spacing of boreholes and a leveling line to facilitate the mount of the console to the wall. Simply cut the template out of the cardboard lid and proceed to assembly.




ENERGY EFFICIENCY

- Higher efficiency throughout the adjustment range in comparison to regular motors
- Excellent durability
- Low maintenance costs
- Possibility of connecting directly to BMS system
- Silent with considerable rates of rotation
- Adjustment of fan rates rotation with 0-10V DC signal

Comparison of motor efficiency

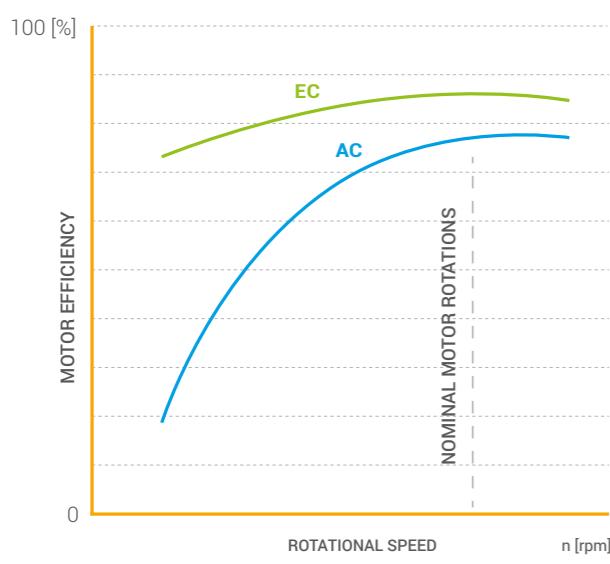

COMFORT AND FLEXIBILITY

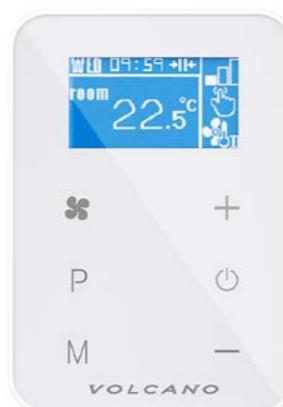

Microprocessor controller of EC curtain

- Cooperation with external temperature sensors
- Heaters working time calendar for workdays and weekends
- Working in BMS systems
- Possibility of working in automatic and 3-level mode of speed control
- Up to 8 heaters can be connected to one controller!

VOLCANO VR-D

Destratifier



Parameter	---	VOLCANO VR-D
Maximum air output	m^3/h	6500
Maximum horizontal air range	m	28
Maximum vertical air range	m	15
Device weight (without water)	kg	22
Power supply voltage	V/Hz	1 ~ 230/50
Motor power EC	kW	0,37
Rated current EC	A	1,7
Rated motor rotational speed EC	rpm	1400
Protection rating EC	IP	44

Selection method in terms of room size:


Assembly height should be no less than 3/4 of the height of the room, measuring from the floor.

An example calculation of the minimal VOLCANO VR-D destratifier assembly height:

$$H_{\min} = \frac{3}{4} \times H$$

In a room of $H=12\text{m}$, the minimal VOLCANO VR-D destratifier assembly height will be:

$$H_{\min} = \frac{3}{4} \times 12 \text{ m} = 9\text{m}$$

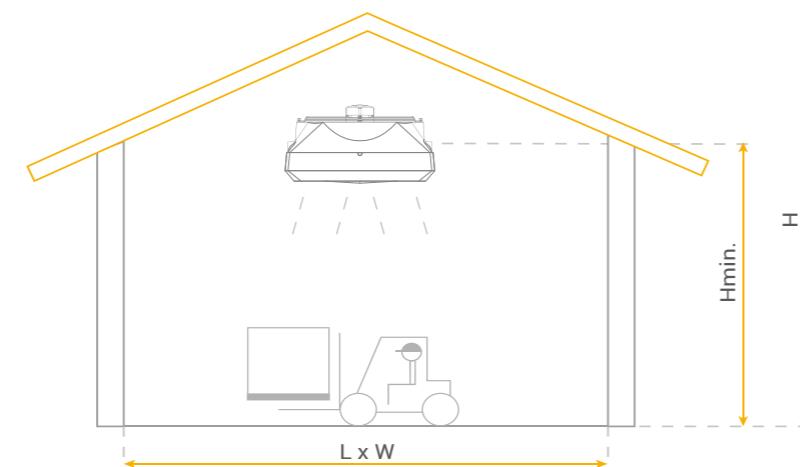

Description:
H - height
L - length
W - width

Automation

Parameters					
Model	-	Potentiometer VR EC (0-10 V)	Potentiometer with thermostat VR EC (0-10 V)	Controller HMI VR (0-10V)*	Controller Volcano EC*
VTS product number	-	1-4-0101-0453	1-4-0101-0473	1-4-0101-0169	1-4-0101-0457
Motor support	-			EC	
Power supply voltage	V/ph/Hz	~230/1/50	~230/1/50	~230/1/50	~230/1/50
Permissible load	A	0,02 A for 0-10V	0,02 A for 0-10V	1A for 230VAC 0,02A for 0-10V	1A for 230VAC 0,02A for 0-10V
Setting range	°C	-	5...40	5...40	5...40
Work mode	--		Manual		Manual / automatic
Hourly-weekly calendar	--	No	No	Yes	Yes
Clock	--	No	No	Yes	Yes
Temperature measurement	--	-	Integrated in the device		Integrated in the device
The possibility of connecting a separate temperature sensor	pcs.	No	No	1 or 4	1 or 4
Output signal	--		0-10V DC		
Protection rating	IP		30		

* Please check the availability with Your local distributor


Cooperation of controllers and regulators with water heaters					
Model		Potentiometer VR EC (0-10 V)	Potentiometer with thermostat VR EC (0-10 V)	Controller HMI VR (0-10V)	Controller Volcano EC
VTS article No.		1-4-0101-0453	1-4-0101-0473	1-4-0101-0169	1-4-0101-0457
Cooperation with motors		EC			
VR Mini	pcs.	8	8	8	8
VR1	pcs.	8	8	8	8
VR2	pcs.	8	8	8	8
VR3	pcs.	8	8	8	8
VR-D	pcs.	8	8	8	8

Parameters		
VTS product number	1-2-1204-2019	
Power supply voltage	V/ph/Hz	~230/1/50
Power consumption	W	1
Connection	"	3/4
Kvs	m^3/h	4,5
Opening/ closing time	min.	3/3
Protection rating	IP	54

Parameters		
VTS product number	1-2-1205-0007	
Resistance measurement element	kΩ	NTC 10K
Assembly	--	on-plaster
Maximum length of signal wire	m	100
Ambient temperature	°C	-20...+70
Temperature measurement range	°C	-20...+70
Protection rating	IP	66



EXAMPLE CONNECTION DIAGRAM OF VOLCANO EC

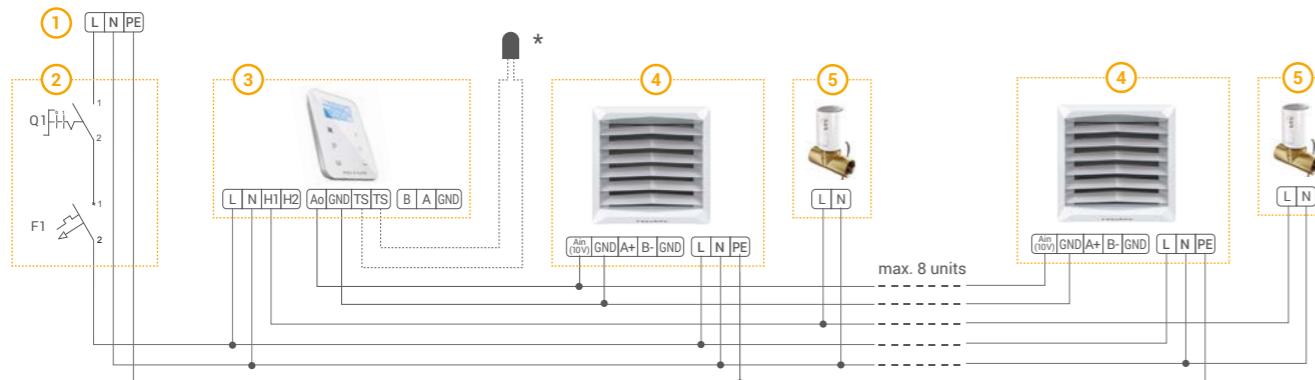


1. Power supply 230V/50 Hz
2. Main switch, fuses
3. Volcano EC controller

4. Volcano VR Mini, VR1, VR2, VR3, VR-D (possibility of connecting 8 units to one controller)
5. Valve with actuator

* Temperature sensor installed optionally

ALL EC HEATERS ARE CHARACTERIZED BY EASE AND SIMPLICITY OF CONNECTION

EXAMPLE OF A HYDRAULIC SYSTEM

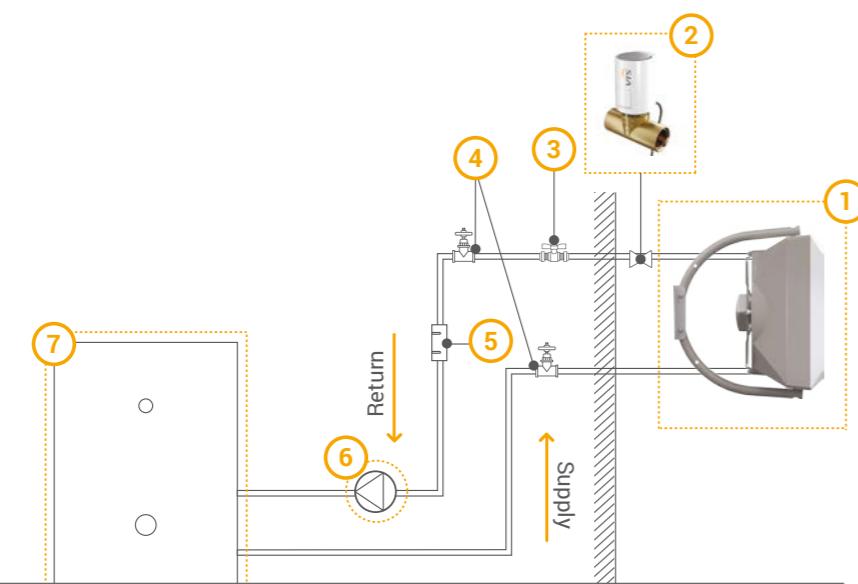


1. Unit heater
2. Valve with actuator
3. Vent valve
4. Cut-off valve

5. Filter
6. Circulation pump
7. Boiler


Device type series

VOLCANO	VR Mini	VR1	VR2	VR3	VR-D
HEATING POWER RANGE	3-20 kW	5-30 kW	8-50 kW	13-75 kW	-
MAXIMUM AIR OUTPUT*	2100 m³/h	5300 m³/h	4850 m³/h	5700 m³/h	6500 m³/h
HORIZONTAL RANGE (MAX.)	14 m	23 m	22 m	25 m	28 m
VERTICAL RANGE (MAX.)	8 m	12 m	11 m	12 m	15 m

* maximum speed 0.5 m/s

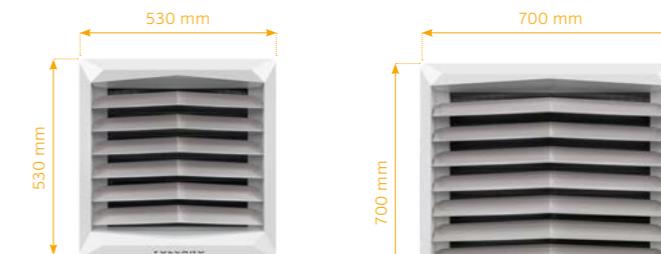





VR MINI

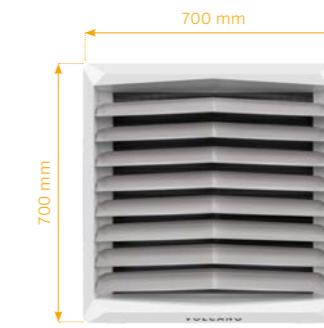

VR1, VR2, VR3, VR-D



Air speed in the distance function

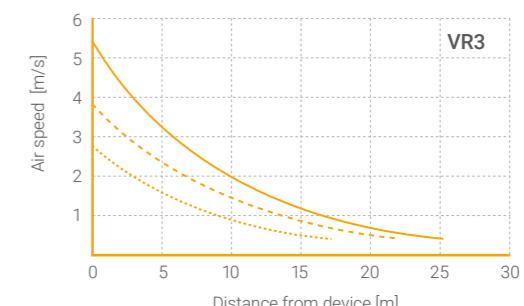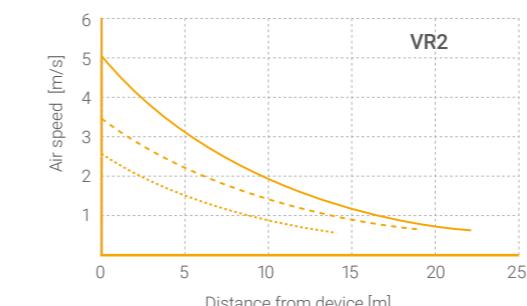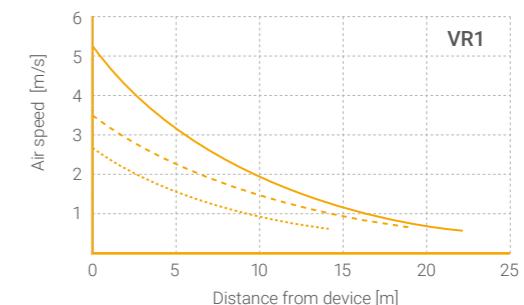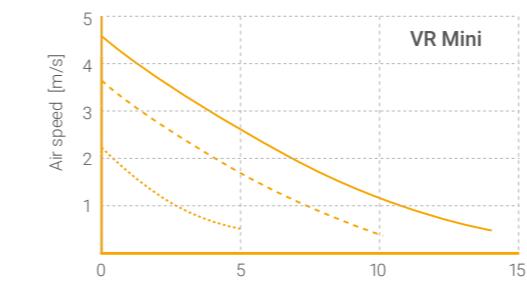

FAQ DEVICES

1. HOW DO I CORRECTLY SELECT A VOLCANO HEATER?

Step one: determine the temperature inside the target room and its heat demand for heating purposes. Air heating is one of the most dynamic methods of heating rooms, allowing for the application of temporary (e.g. overnight) temperature lowering in the heating room and its fast heating right before use. This allows for significant reductions in heat consumption, but does not require any heating power surpluses to be added to the devices for quick heating.

Step two: determine the location of heaters and the necessary air stream range to guarantee the achievement of suitable temperatures in the areas of the room you are interested in. Notice that the air speed should not exceed the permissible values in human occupancy zones or on any other sensitive areas, e.g. in the vicinity of industrial processes.

Step three: obtain information on the temperature of the heating medium and access to the building.

Step four: Having all of the aforementioned data, take the VOLCANO catalogue and look for devices which fulfill the criteria of the required air stream and required heating power, considering the possibility of work at varying outputs (first, second or third speed). Use the charts presenting air speeds in the distance function to determine the range for each device size. Alternatively, use the chart on page 19, presenting the range for limit speed of 0.5 m/s. Determine the heating power for each device speed and for various heating medium temperatures using the tables on pages 22-23.

Easy selection "shortcut": To make your work easier, use a selection program available at: ehcad.vtsgroup.com.

2. KEY ADVANTAGES OF EC MOTORS.

EC motor is an electronically commutated brushless direct current motor. Compared to standard motors, the efficiency of the EC motor is higher throughout their entire control range, which gives significant reduction in energy costs. Units equipped with these motors are characterized by excellent durability with minimal costs associated with their operation. Low noise level even with considerable rates of rotation, which has a favourable influence on acoustics of devices in which these motors are installed. Possibility of connection with the BMS system allow to control all units from one place.

3. HOW DOES EC MOTORS REGULATION WORKS?

The speed of a fan equipped with an EC motor is regulated using the 0-10 V signal. Optionally, use a simple wall-mounted potentiometer allowing for step-less efficiency change or an advanced microprocessor controller, which can carry out a series of other functions (regulation of temperature in the room, weekly program ON/OFF and working parameter settings, anti-freeze functions, etc.), apart from the 3 saved efficiency thresholds.

4. HOW SHOULD I GRADE THE DIAMETERS OF THE MAIN FEED PIPELINES WHEN CONNECTING A LARGE NUMBER OF HEATERS?

The diameter of the main pipeline should be adapted in such a manner that the water flow speed does not exceed 2.5 m/s. This is caused by a compromise between investment costs related to the size of the pipes used and usage costs related to the resistance of water flow in pipelines. We recommend the following minimum pipeline diameters, depending on the number of devices and type of heaters connected to the main, according to the table on page 20.

In the case of extensive installations, i.e. when heaters are situated at least 10 m from the heat source, the diameters of pipelines should be corrected by considering lower water flow speeds.

5. HOW DO I CONNECT THE THERMO-STAT TO HAVE THE FAN SWITCH OFF WHEN THE VALVE IS CLOSED?

The VOLCANO technical documentation contains electrical connection diagrams for various operation variants. The easiest way of obtaining an interlock of the fan switching function with valve closing is to connect the entire device to a power grid secured with a circuit breaker via a thermostat. In this case, pay attention to the maximum permissible load of thermostat contacts; this permissible load should be at least 3 (10) A per single VOLCANO device.

When the contact load is too small, an electrical relay with a coil powered by a thermostat (230 V DC) should be used, and the voltage of working contacts should be 230 V AC, and the load of working contacts should be adapted to the number of VOLCANO devices controlled.

6. CAN I CONNECT A FEED PIPELINE TO THE UPPER HEAT EXCHANGER MANIFOLD?

Yes, you can, although a heat exchanger powered by an upper manifold will be more difficult to vent. Remember to leave sufficient space for mounting a valve actuator, which should be installed on the return stub pipe.

7. CAN I FEED VOLCANO VR MINI / VR1 / VR2/ VR3 HEATERS WITH A NON-FREEZE MEDIUM?

Yes, you can. The most frequently used non-freeze medium is a water solution of ethylene glycol. The heaters mounted in VOLCANO can support up to 50% mixtures. Make sure to check, however, if other elements of the technological heat installation (valves, pump, etc.) are adapted to work on glycol mix. To do this, check the recommendations of the manufacturers of particular components used.

Remember that the use of glycol mixes, which are usually characterized by higher viscosity and lower

thermal capacity, compared to water, increases the resistance of heating medium flow and reduces the heating power of the device.

8. CAN THE VOLCANO VR MINI/VR1 / VR2/ VR3 HEATER BE USED TO COOL DOWN AIR AS WELL?

Yes, but only when the temperature of the working medium is higher than the dew point of the cooled air, since VOLCANO devices are not equipped with drip trays and we shouldn't lead to the condensation of humidity. To switch a VOLCANO device to the cooling function, connect an ice water installation. When there is the risk that the temperature of the working medium could fall below the dew point of the cooled air, make sure to build a drip tray and install it under the device. In this case, the VOLCANO device will be able to work with the horizontal air outlet only. The use of a VOLCANO device with vertical air outlet can result in flooding the fan motor or the space under the device, since mounting a drip tray in this position of the device is impossible.


VOLCANO is not equipped with a liquid trap, which is why you should always reduce its work efficiency in the cooling mode, in order to eliminate the phenomenon of drip-trapping by the air flowing through the heat exchanger.

9. CAN VOLCANO VR MINI / VR1 / VR2 / VR3 HEATERS SUPPORT HEAT PUMPS?

Yes, VOLCANO water heaters can cooperate with heat pumps. However, when selecting the size of the device, take the low temperature of the heating medium into account. We recommend the use of heaters with large heat exchange surfaces. For this type of installation, we recommend the VR3 heater equipped with a three-row heat exchanger. Make sure to check VR Mini and VR2 with two-row heat exchangers as well.



**FAQ
AUTOMATION**
**Scan and
download**

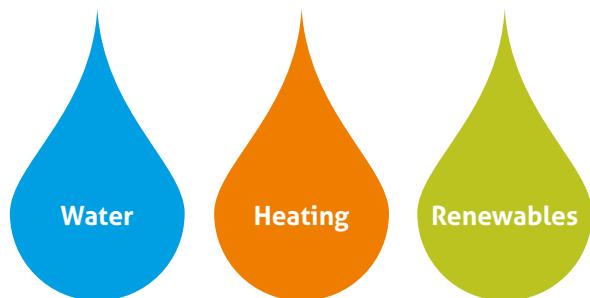

Mibec Limited

Unit 12
Arlington Court
Cannel Row
Silverdale Enterprise
Newcastle-Under-Lyme
ST5 6SS

Tel: +44 (0)330 053 8880
Fax: +44 (0)1948 871794

Web: www.mibec.co.uk